

Industrial Pressure Transmitter Model S-10, S-11

Datasheet S-10

Applications

- Hydraulics and pneumatics
- Test equipment
- Pump and compressor control
- Liquid level measurement

Special Features

- Standard ranges available from stock
- 4-20 mA 2-wire output signal, others available
- Highly resistant to pressure spikes and vibration
- Stainless steel case and wetted parts
- Can be assembled to diaphragm seals for special applications



Left: S-10 with NPT process connection

Center: S-11 with flush diaphragm process connection

Right: S-11 with flush diaphragm process connection and integral cooling element

Description

WIKA S-10 and S-11 pressure transmitters are precision engineered to fit most industrial pressure measurement applications. The compact, rugged design make these instruments suitable for applications including hydraulics and pneumatics, vacuum, test equipment, liquid level measurement, press control, compressor control, pump protection and numerous other processing and control operations. A wide range of electrical connection and process connection options are available to meet almost any requirement.

Rugged construction

The S-10 features an all-welded stainless steel measuring cell for improved media compatibility. There are no internal soft sealing materials that may react with the media or deteriorate over time. The compact case is also made of stainless steel and is available with environmental protection ratings up to NEMA 6P / IP 68.

The S-11 transmitters feature a flush diaphragm process connection. They are specifically designed for the measurement of viscous fluids or media containing solids that may clog a NPT process connection. Flush diaphragm pressure transmitters are available in pressure range from 50INWC to 8000PSI. For high temperature media an integral cooling element is available on the S-11. This option increases the maximum media temperature to 300°F.

Each instrument undergoes extensive quality control testing and calibration to achieve an accuracy of $\leq 0.25\%$ full scale. The printed circuit boards use state-of-the-art surface mount technology and are potted in silicone gel for protection against mechanical shock, vibration, and moisture. Each is individually temperature compensated to assure accuracy and long-term stability even when exposed to severe ambient temperature variations.


Specifications		Model S-10 / S-11									
Pressure range	50inWC	5psi	10psi	25psi	30psi	60psi	100psi	160psi	200psi		
Maximum pressure*	14psi	29psi	58psi	145psi	145psi	240psi	500psi	1160psi	1160psi		
Burst pressure**	29psi	35psi	69psi	170psi	170psi	290psi	600psi	1390psi	1390psi		
Pressure range	300psi	500psi	1000psi	2000psi	3000psi	5000psi	8000psi	10000psi ¹	15000psi ¹		
Maximum pressure*	1160psi	1160psi	1740psi	4600psi	7200psi	11,600psi	17,400psi	17,400psi	21,750psi		
Burst pressure**	1390psi	5800psi	7970psi	14,500psi	17,400psi	24,650psi	34,800psi	34,800psi	43,500psi		
{vacuum, gauge pressure, compound ranges, and absolute pressure references are available}											
¹⁾ Ranges only available with Model S-10											
²⁾ For Model S-11 the burst pressure is limited to 21,000psi unless the pressure seal is accomplished by using the sealing ring underneath the hex.											
*Pressure applied up to the maximum rating will cause no permanent change in specifications but may lead to zero and span shifts											
**Exceeding the burst pressure may result in destruction of the transmitter and possible loss of media											
Materials											
■ Wetted parts			(other materials see WIKA diaphragm seal program)								
➤ Model S-10			Stainless steel								
➤ Model S-11			Stainless steel								
■ Case			O-ring: NBR ³⁾ {Viton or EPDM}								
Internal transmission fluid ⁴⁾			Stainless steel								
			Synthetic oil {Halocarbon oil for oxygen applications} ⁵⁾								
			{Listed by FDA for food applications}}								
³⁾ O-ring made of Viton or EPDM for Model S-11 with integral cooling element.											
⁴⁾ Not available with Model S-10 in pressure ranges >300 psi.											
⁵⁾ Media temperature for oxygen version: -22 ... 140 °F / -30 ... +60 °C. Oxygen version is not available in vacuum and absolute pressure ranges or with S-11 > 500 psi											
Power supply U _B ⁶⁾	U _B in DC V	10 < U _B ≤ 30 (14 ... 30 with signal output 0 ... 10 V)									
Signal output and maximum load R _A	R _A in Ohm	4 ... 20 mA, 2-wire	R _A ≤ (U _B - 10 V) / 0.02 A								
		0 ... 20 mA, 3-wire	R _A ≤ (U _B - 3 V) / 0.02 A								
		{0 ... 5 V, 3-wire}	R _A > 5000								
		{0 ... 10 V, 3-wire}	R _A > 10,000 {other signal outputs available}								
Adjustability zero/span	%	± 10 using potentiometers inside the instrument									
Response time (10 ... 90 %)	ms	≤ 1 (≤ 10 ms at media temperatures below -22°F (-30°C) for ranges < 300 psi or with flush diaphragm process connection)									
Isolation voltage	DC V	500									
		⁶⁾ NEC Class 02 power supply (low voltage and low current max. 100 VA even under fault conditions)									
Accuracy ⁷⁾	% of span	≤ 0.25 {0.125} ⁸⁾ (BFSL)									
	% of span	≤ 0.5 {0.25} ⁸⁾ (limit point calibration)									
⁷⁾ Including linearity, hysteresis and repeatability.											
Limit point calibration performed in vertical mounting position with pressure connection facing down.											
⁸⁾ Improved accuracy is available for pressure ranges ≥ 100 inWC											
Non-repeatability	% of span	≤ 0.05									
1-year stability	% of span	≤ 0.2 {at reference conditions}									
Permissible temperature of											
■ Medium ⁹⁾			-22 ... +212 °F {-40 ... +257 °F}		-30 ... +100 °C {-40 ... +125 °C}						
			S-11 with cooling element: -4 ... +302 °F		S-11 with cooling element: -20 ... +150 °C						
■ Ambient ⁹⁾			-4 ... +176 °F		-20 ... +80 °C						
			S-11 with cooling element: -4 ... +176 °F		S-11 with cooling element: -20 ... +80 °C						
■ Storage ⁹⁾			-40 ... +212 °F		-40 ... +100 °C						
			S-11 with cooling element: -4 ... +212 °F		S-11 with cooling element: -20 ... +100 °C						
⁹⁾ Also complies with EN 50178, Tab. 7, Type C, Class 4KH Operation, 1K4 Storage, 1K3 Transport											
Compensated temperature range		32 ... +176 °F		0 ... +80 °C							
Temperature coefficients (TC) within compensated temp range:											
■ Mean TC of zero		% of span	≤ 0.2 / 10 K {< 0.4 for pressure range ≤ 100 inWC}								
■ Mean TC of range		% of span	≤ 0.2 / 10 K								
CE - conformitity			89/336/EWG interference emission and immunity see EN 61 326, interference emission limit class A and B, 97/23/EG Pressure equipment directive (Module H)								
Shock resistance	g	1000 according to IEC 60068-2-27 (mechanical shock)									
Vibration resistance	g	20 according to IEC 60068-2-6 (vibration under resonance)									
Wiring protection			Protected against reverse polarity, overvoltage and short circuit								
Weight	lb	Approx. 0.4									

{ } Items in curved brackets { } are optional extras for additional price.


Dimensions in inches(mm)

Electrical connections


L-connector, DIN EN 175301-803, Form A (DIN 43 650) for conductor cross section up to max. 1.5 mm², conductor outer diameter 0.3" (6-8 mm), NEMA 5 / IP 65 Order code: A4




Circular connector M 12x1, 5-pin, NEMA 4 / IP 67 Order code: M5

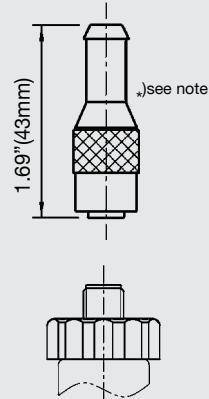



Flying leads conductor cross section up to max. 0.5 mm² / AWG 20 with end splices, conductor outer diameter 6.8 mm, NEMA 4 / IP 67 Order code: DL



Cable with free ends, adjustable zero and span conductor cross section up to max. 0.5 mm² / AWG 20 with end splices, conductor outer diameter 6.8 mm, NEMA 6 P / IP 68 Order code: XM




Case




S-10 pressure connections (others available)


1/2 NPT male Order code: ND




1/4 NPT male Order code: NB



G1/2B male Order code: GD




G1/4B male Order code: GB




S-11 flush diaphragm pressure connections


G 1B with or without cooling element 50 INWC to 30 PSI Order code: 85

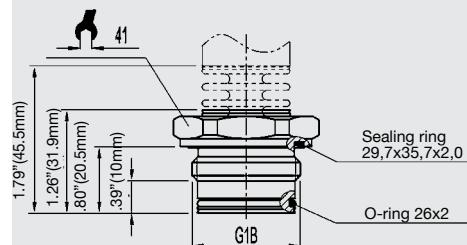

G 1/2 B with or without cooling element 50 PSI to 8000 PSI Order code: 86

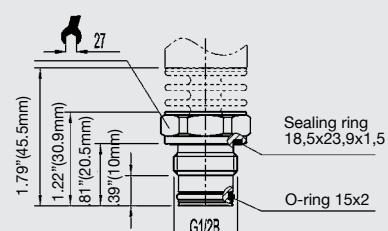


G1B according to EHEDG ** with cooling element, up to 302°F (150°C) 100 INWC to 250 PSI Order code: 84

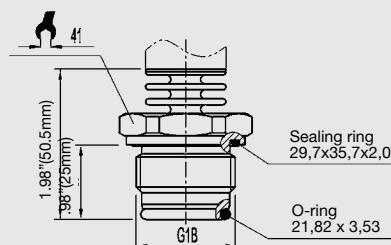


** European Hygienic Equipment Design Group

*) Mating connector not included


Matching P-1 weld insert adapters for S-11 pressure transmitters



P-1 G1 weld insert adapter
Part # 1206974
for pressure ranges \leq 30 PSI



P-1 G1/2 weld insert adapter
Part # 1097008
for pressure ranges \geq 50 PSI

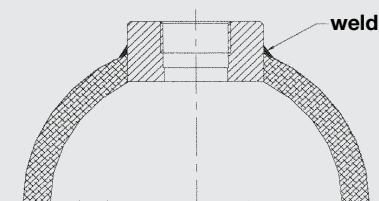

Cross section view of P-1
adapter installed in pipe.

Wiring

	2-wire system	3-wire system
L-Connector, DIN EN 175301-803, Form A (DIN 43 650)		
M12x1 Circular connector 5 pin		
Vented cable with free ends		

Legend:

	power supply
	load (e.g. display)
	Sig+ output signal positive
	UB+ power supply positive
	0V power supply negative
	Sig- output signal negative

Specifications and dimensions given in this data sheet represent the state of engineering at the time of printing.
Modifications may take place and materials specified may be replaced by others without prior notice.

